



LED SPOT LIGHT

LiteMagic's LED spot light series adopt high brightness LEDs and smart constant current control circuit inside, ensuring high quality. The shell is made of thermal performance aluminum alloy which has exquisite appearance.

LiteMagic's LED spot light series have features such as smooth natural light, long lifespan—around 35,000 hours, energy saving and environmental friendly.

LiteMagic's LED spot light series have two power options available: 3W and 5W. The working voltage can be DC12V and 100 ~ 240VAC according to different products. Luminous flux can be up to 240lm and 400lm as per different power and color. Please refer the following tables for details.

Special lens design, stable color temperature, excellent color rendering make LiteMagic's LED spot light has outstanding visual effects, which is the best choice to replace traditional lighting products.



Features:

- ◆ 1W high power LED.
- ◆ Patented packaging technology and heat dissipation design ensure the heat disperses quickly.
- ◆ Over 35000 hours lifespan.
- ◆ No infrared and UV, No harm to human.
- ◆ Smart constant current control circuit to eliminate flicker and ripple, present smooth natural light.
- ◆ Excellent color rendering (CRI>90), it makes the illuminated object looks natural and vividly.
- ◆ Excellent heat dissipation design based on aluminum alloy structure, the surface temperature is below 65 ° C, more safe and stable.
- ◆ Working frequency is up to 43-63Hz.
- ◆ The beam angle is 10° /25° /45°.
- ◆ CE and ROHS certificated.

Applications:

- ◆ Interior accent lighting and perimeter lighting.
- ◆ Exhibit lighting.
- ◆ Museum lighting.
- ◆ Scene lighting such as valley, restaurant, hotel, etc. ;
- ◆ Display lighting such as shopping mall, showroom and counter etc.





MR16 3W White

SPECIFICATIONS

LED	High Power LED
Lamp Holder	GU5.3
Outside Diameter Size	50mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10° / 25° / 45°
Voltage(V)	12VAC/DC
Power	3W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	6000k
Weight(g)	45g
Packing	50pcs / ctn

Order Information

LPH50MR16A1-A-3*1CW60-01	MR16 GU5.3, 3W, 12VAC / DC, 25°, 6000k, white
LPH50MR16A1-A-3*1CW60-02	MR16 GU5.3, 3W, 12VAC / DC, 45°, 6000k, white
LPH50MR16A1-A-3*1CW60-03	MR16 GU5.3, 3W, 12VAC / DC, 10°, 6000k, white

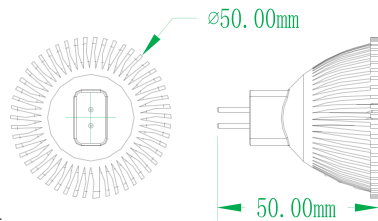

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

SPECIFICATIONS



LED	High Power LED
Lamp Holder	GU5.3
Outside Diameter Size	50mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	Warm White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10° / 25° / 45°
Voltage(V)	12VAC / DC
Power	3W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	2900k
Weight(g)	45g
Packing	50pcs / ctn

Order Information

LP50MR16A1-A-3*1WW29-01	MR16 GU5.3, 3W, 12VAC/DC, 25°, 2900k, warm white
LP50MR16A1-A-3*1WW29-02	MR16 GU5.3, 3W, 12VAC/DC, 45°, 2900k, warm white
LP50MR16A1-A-3*1WW29-03	MR16 GU5.3, 3W, 12VAC/DC, 10°, 2900k, warm white



MR16 3W Warm White

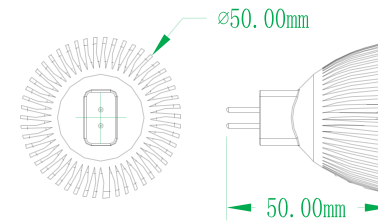

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.



E27 3W White

SPECIFICATIONS

LED	High Power LED
Lamp Holder	E27
Outside Diameter Size	50mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10° / 25° / 45°
Voltage(V)	100~240VAC/DC
Power	3W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	6000k
Weight(g)	45g
Packing	50pcs / ctn

SPECIFICATIONS

LED	High Power LED
Lamp Holder	E27
Outside Diameter Size	50mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	Warm White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10° / 25° / 45°
Voltage(V)	100~240VAC/DC
Power	3W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	2900k
Weight(g)	45g
Packing	50pcs / ctn




E27 3W Warm White

Order Information

LPH50E27A1-F-3*1CW60-01	E27, 3W, 100~240VAC / DC, 25°, 6000k, white
LPH50E27A1-F-3*1CW60-02	E27, 3W, 100~240VAC / DC, 45°, 6000k, white
LPH50E27A1-F-3*1CW60-03	E27, 3W, 100~240VAC / DC, 10°, 6000k, white


Order Information

LP50E27A1-F-3*1WW29-01	E27, 3W, 100~240VAC / DC, 25°, 2900k, Warm White
LP50E27A1-F-3*1WW29-02	E27, 3W, 100~240VAC / DC, 45°, 2900k, Warm White
LP50E27A1-F-3*1WW29-03	E27, 3W, 100~240VAC / DC, 10°, 2900k, Warm White

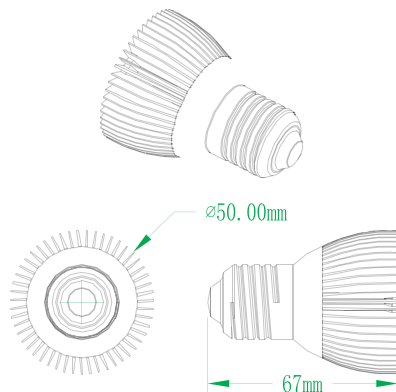

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on;
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

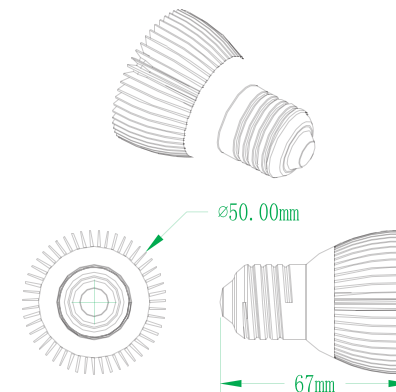

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

SPECIFICATIONS

LED	High Power LED
Lamp Holder	E27
Outside Diameter Size	60mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	White
Luminous Flux(lm)	400lm
Radiation Angle(°)	25° / 45°
Voltage(V)	100 ~ 240VAC/DC
Power	5W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	6000k
Weight(g)	150g
Packing	30pcs / ctn

SPECIFICATIONS

LED	High Power LED
Lamp Holder	E27
Outside Diameter Size	60mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	Warm White
Luminous Flux(lm)	400lm
Radiation Angle(°)	25° / 45°
Voltage(V)	100 ~ 240VAC / DC
Power	5W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	2900k
Weight(g)	150g
Packing	30pcs / ctn



E27 5W White




E27 5W Warm White

Order Information

LPH60E27A1-F-5*1CW60-01	E27, 5W, 100-240VAC / DC, 25°, 6000k, white
LPH60E27A1-F-5*1CW60-02	E27, 5W, 100-240VAC / DC, 45°, 6000k, white


Order Information

LPH60E27A1-F-5*1WW29-01	E27, 5W, 100-240VAC / DC, 25°, 2900k, warm white
LPH60E27A1-F-5*1WW29-02	E27, 5W, 100-240VAC / DC, 45°, 2900k, warm white

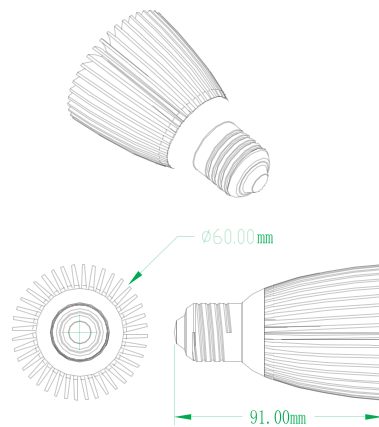

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

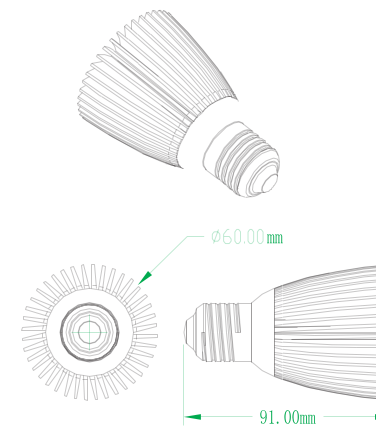

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.



GU10 3W White

SPECIFICATIONS

LED	High Power LED
Lamp Holder	GU10
Outside Diameter Size	50mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10° / 25° / 45°
Voltage(V)	100~240 VAC / DC
Power	3W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	6000k
Weight(g)	70g
Packing	50pcs / ctn

SPECIFICATIONS

LED	High Power LED
Lamp Holder	GU10
Outside Diameter Size	50mm
Material	Gold/Silver/Black aluminum alloy shell
LED Color	Warm White
Luminous Flux(lm)	240lm
Radiation Angle(°)	10°/25°/45°
Voltage(V)	100~240VAC/DC
Power	3W
Working Temperature(°C)	-10°C~+40°C
Storage Temperature(°C)	-40°C~+70°C
Color Temperature(k)	2900k
Weight(g)	70g
Packing	50pcs/ctn




GU10 3W warm white

Order Information

LPH50G10A1-F-3*1CW60-01	GU10, 3W, 100-240VAC / DC, 25°, 6000k, white
LPH50G10A1-F-3*1CW60-02	GU10, 3W, 100-240VAC / DC, 45°, 6000k, white
LPH50G10A1-F-3*1CW60-03	GU10, 3W, 100-240VAC / DC, 10°, 6000k, white


Order Information

LPH50G10A1-F-3*1WW29-01	GU10, 3W, 100-240VAC / DC, 25°, 2900k, warm white
LPH50G10A1-F-3*1WW29-02	GU10, 3W, 100-240VAC / DC, 45°, 2900k, warm white
LPH50G10A1-F-3*1WW29-03	GU10, 3W, 100-240VAC / DC, 10°, 2900k, warm white

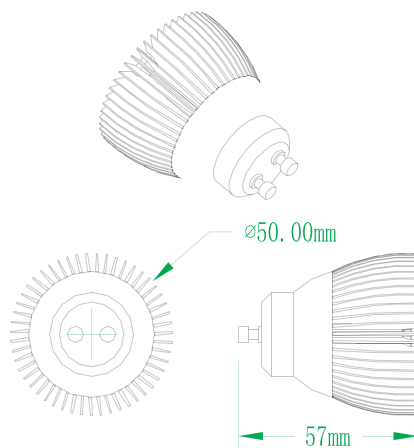

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

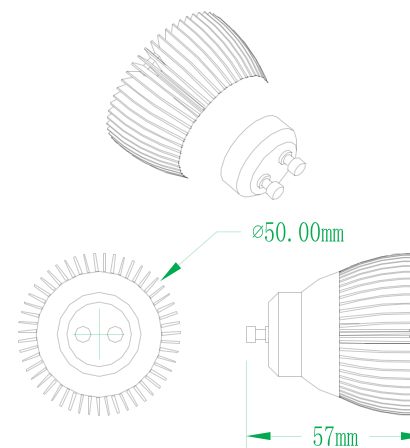

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.



GU10 5W White

SPECIFICATIONS

LED	High Power LED
Lamp Holder	GU10
Outside Diameter Size	60mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	White
Luminous Flux(lm)	400lm
Radiation Angle(°)	25° / 45°
Voltage(V)	100~240 VAC / DC
Power	5W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	6000k
Weight(g)	150g
Packing	30pcs / ctn

SPECIFICATIONS

LED	High Power LED
Lamp Holder	GU10
Outside Diameter Size	60mm
Material	Gold / Silver / Black aluminum alloy shell
LED Color	Warm White
Luminous Flux(lm)	400lm
Radiation Angle(°)	25° / 45°
Voltage(V)	100 ~ 240VAC / DC
Power	5W
Working Temperature(°C)	-10°C ~ +40°C
Storage Temperature(°C)	-40°C ~ +70°C
Color Temperature(k)	2900k
Weight(g)	150g
Packing	30pcs / ctn




GU10 5W Warm White

Order Information

LPH60G10A1-F-5*1CW60-01	GU10, 5W, 100-240VAC / DC, 25°, 6000k, white
LPH60G10A1-F-5*1CW60-02	GU10, 5W, 100-240VAC / DC, 45°, 6000k, white


Order Information

LPH60G10A1-F-5*1WW29-01	GU10, 5W, 100-240VAC / DC, 25°, 2900k, warm white
LPH60G10A1-F-5*1WW29-02	GU10, 5W, 100-240VAC / DC, 45°, 2900k, warm white

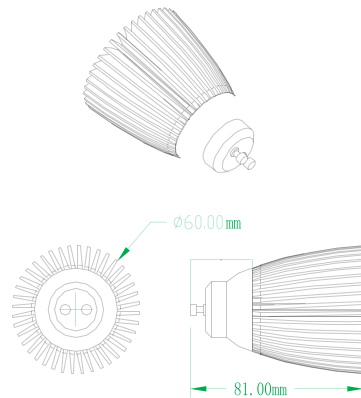

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.

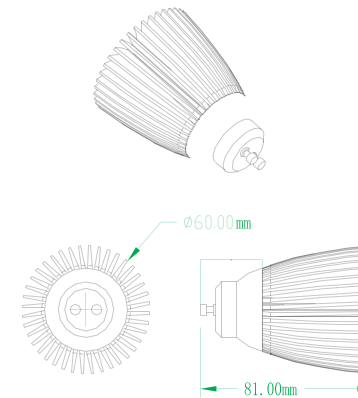

Note:

- ◆ Indoor use only, IP54.
- ◆ Do not touch lamp surface when power is on.
- ◆ Do not watch the light-emitting surface directly.
- ◆ Please choose the right power supply to match the product.
- ◆ Please make sure the power is off before installation.