



SPECIFICATIONS

Node Specifications

Color Range	16,777,216(24Bit)additive colors (RGB)
Source	Super Bright LED 1R/1G/1B
Light Intensity	132 cd/m ²
Beam Angle	110°/50°

Environmental Specifications

Working Temperature	-4°F to 122°F (-20°C to 50°C)
Storage Temperature	-40°F to 158°F (-40°C to 70°C)
Protection Rate	IP65

Communication Specifications

Data Interface	LiteMagic Dedicated BUS
Data Cable	6-conductor Flat Wire
Power Supply	WPS-150-5
Input Voltage	85-265VAC
Input Frequency	47-63HZ
Output Voltage	5V
Output Current	30A
Power Rating	128W

Electrical Specifications


Power Cable	RVV,2×1.5mm ²
Input Voltage	DC5V per node
Power Consumption	Max.0.3W per node

Benefits:

- ◆ Flying case package easy for transportation.
- ◆ Quick to setup and disassemble.
- ◆ Suitable for any size stage.
- ◆ Light weight and flexible.
- ◆ Dramatic and vivid lighting effects.

SOFTLED CURTAIN

SoftLED Curtain is a dynamic drapery based on LiteMagic's latest LED illumination technology, which is design for stage lighting. By using high-quality flame retardant black velvet drapery, it adopts high brightness LED nodes with specified resolution (pitch 150mm, size: 1.3m W×8m H). Numbers of SoftLED Curtains can be joint at ease to compose ideal background according to actual stage size. Working with LMS (Lighting Management System), SoftLED Curtain can play videos to make colorful lighting effects on stage.

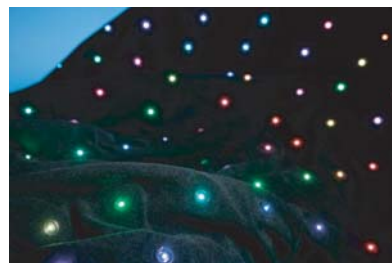

Order Information

201-00021-00	1.3m×8m, pitch 40mm, black LED drapery
--------------	--

Drapery Dimension

Dimension	Pitch	Pixel	Weight
1.3M ×8 M	150MM	8×53=424	18KG/PCS

Controlling Unit

