



ACCESSORIES

Related Products		
Signal Receiver DA701R	Signal Transmitter DA700T	Protection Cover FQ14-1
Extension Cable		
Controller- Receiver CF-8S07XXX-C	(XXX stands for different colors & Length, please refer to related forms)	
Transmitter- Receiver CF-8S07XXX-C		
Conversion Cable		
Controller- Receiver CO-8E01H01-R		

SPECIFICATIONS

Basic Specifications

Color Range	16,777,216 (24bit) additive colors (RGB)
Source	36 High Power 1W LEDs, 12R / 12G / 12B
Source Life	MTBF=35,000hrs (Typical)
Housing	Extruded Aluminums
Connector	VG95234 Connector
Net Weight	3.6kg

Optical Specifications

Beam Angle	50°X 25°
Flux	980lm(RGB)

Environmental Specifications

Working Temperature	-4°F至122°F (-20°C至50°C)
Storage Temperature	-40°F至158°F (-40°C至70°C)
Protection Rating	IP66

Communication Specifications

Data Interface	LiteMagic Dedicated BUS
Data Cable	6-Conductor Round Wire

Electrical Specifications

Power Cable	RVV 2x1.5mm ²
Input Voltage	AC85~265V
Power Consumption	50W Max.

Controller

Host controller	SD3000 , SD4000 , SD5000, ILC3000
Slave controller	DR8104 , DR8016 , DR8116

MAGIC WALL WASHER-A



Magic Wall Washer-A is a full-color wall washer. It is designed to generate rich, saturated colors and color changing effects. Magic Wall Washer-A specially suit to wash color for landscape buildings, squares, scenic spots, wall facade and exhibitions.

Magic Wall Washer-A has 36 high power LEDs (12R / 12G / 12B) with extruded aluminum housing. It provides even colors for wall surface. The angle of light-emitting surface can be manually adjusted. It rated to IP66, for both indoor and outdoor installations in damp or dry locations.

Magic Wall Washer-A integrates power and data management directly within the fixture and no need for an external power supply. It's easy for installation and maintenance.


Magic Wall Washer-A can work independently with internal pre-programming. It can also be controlled by LiteMagic controller or the third-party DMX controller.

Benefits:

- ◆ 36 High Power 1W LEDs.
- ◆ Easy for installation and maintenance.
- ◆ Controllers are optional: LiteMagic online & stand alone controllers or third-party DMX controller.
- ◆ Waterproof, Weather proof, for both indoor and outdoor installation.

Order Information


101-000019-00	36 High Power 1W LEDs, RGB , Black Housing
---------------	--

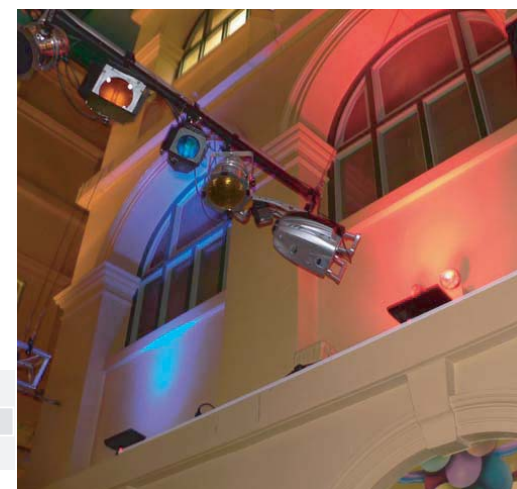




Physical Dimension :

Unit: mm

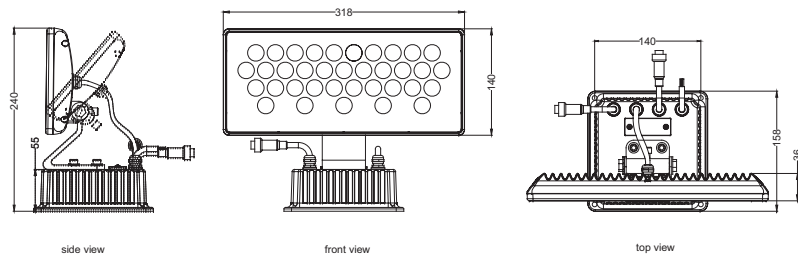


Controlling System Diagram:

1. Standalone Controlling System:

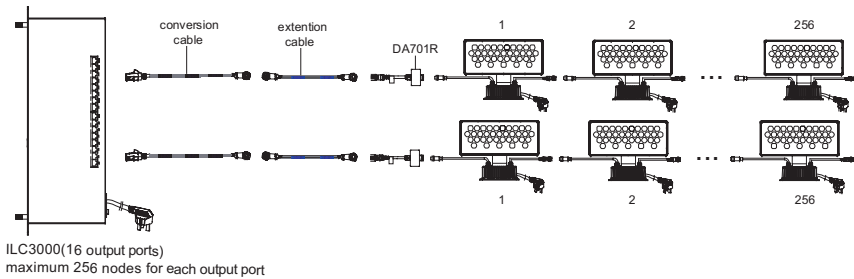

2. DMX Controlling System:

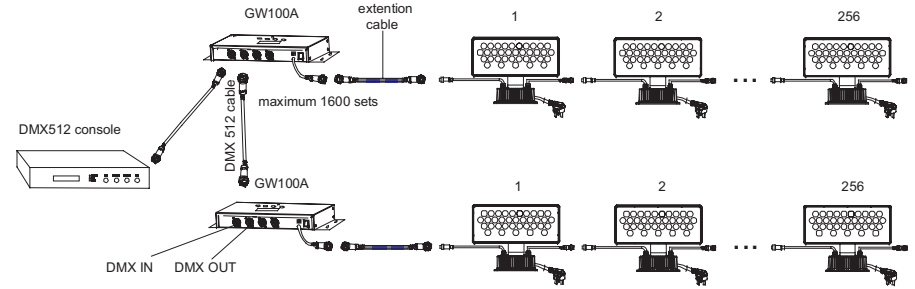

3. Online Controlling System:

