




Applications:

All kinds of outdoor business advertisement, expressway, city square, airport, stadium, community, park and all entertainment clubs.

Outdoor display basic structure:

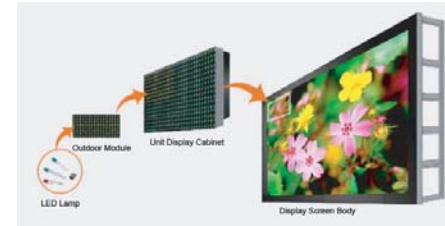

Cabinet Module front view:



Cabinet Module back view:




Features:

- ◆ High and adjustable brightness, which can fully meet customer needs for different applications.
- ◆ Applying physical pixel display technology can present clear, fine and vivid effects of picture and text.
- ◆ Large viewing angle, it is up to 110° in horizontally and 45° vertically, changing within any angle as above mentioned, the image keeps stably and smoothly, no distortion and chromatic aberration.

OUTDOOR FULL COLOR LED DISPLAY

Benefits:

- ◆ Applied high quality LEDs makes the defect rate within 1/10000.
- ◆ Imported high quality silica gel ensure outdoor display is waterproof.
- ◆ Relying on durable components, outdoor display can work under the temperature from -30°C to +80°C
- ◆ Module base shell uses anti-ultraviolet material, it won't embrittle under any weather condition.
- ◆ Cross shaped strength flutes support modules for anti- pressure. It ensures the flatness of cabinets.
- ◆ The sliding plate assembled on the top of cabinet and the slide way on the bottom can adjust the gap between the cabinets. It is also available to use the optional locking device, by which to make sure cabinets are seamless and free extrusion.
- ◆ All face shields are tested through color test to keep the color identity to LED screen's.

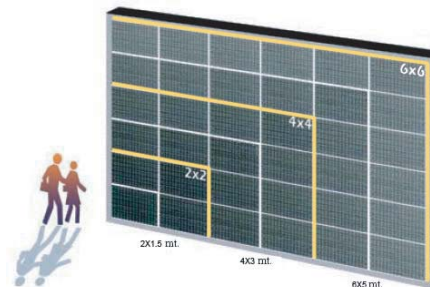

Standard dimensions 4:3 for Pitch 16
(different dimensions and video formats available on request)

Modules	No. of modules	Area (m ²)	Dimensions (mm)	viewing resolution	Viewing graphic definition	Pitch (mm)	Total weight(kg)	Horizontal viewing angle	Brightness (nit)
2x2	4	3.15	2054x1536	3908	128x96	16	240	120°	6500
4x4	16	12.62	4108x3072	3908	256x192	16	960	120°	6500
6x6	36	28.39	6162x4608	3908	384x288	16	2160	120°	6500
8x8	64	50.48	8216x6144	3908	512x384	16	3360	120°	6500
10x10	100	78.87	10270x7680	3908	640x480	16	6000	120°	6500
12x12	144	113.58	12324x9216	3908	768x576	16	8640	120°	6500
14x14	196	154.35	14378x10752	3908	896x672	16	11760	120°	6500
16x16	256	201.6	16432x12288	3908	1024x768	16	15360	120°	6500